
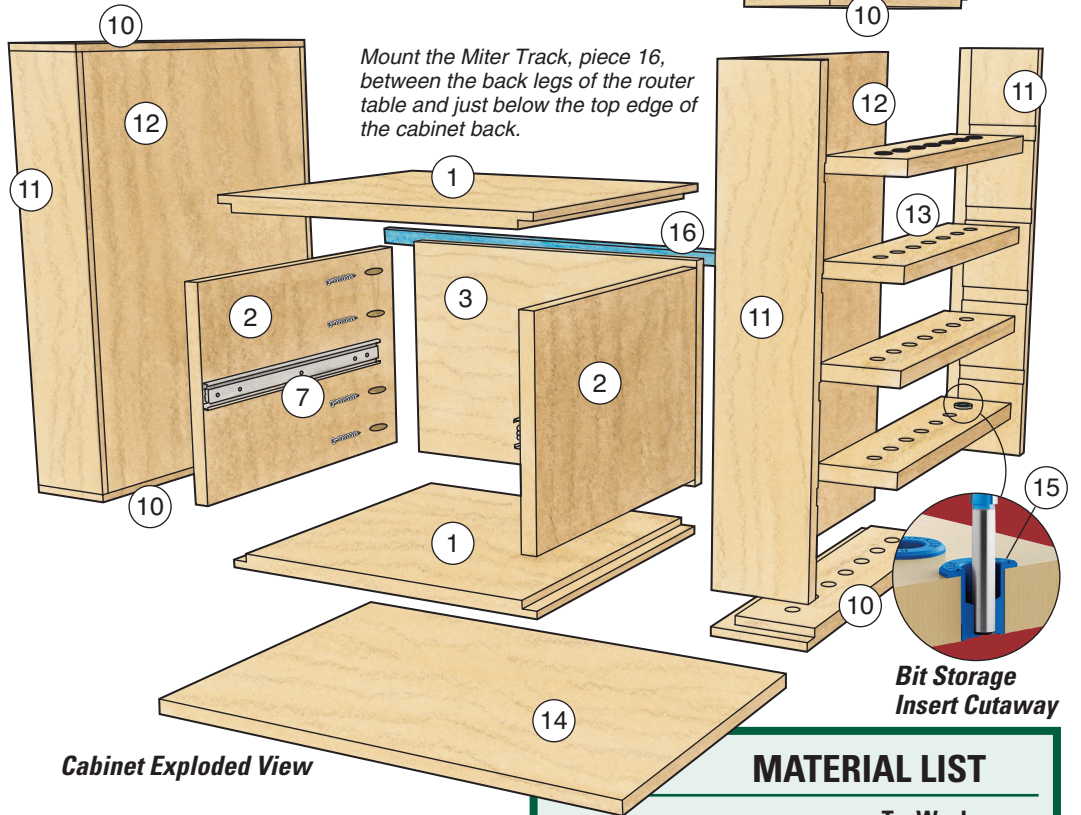


Bit Rack Side

(Inside View)

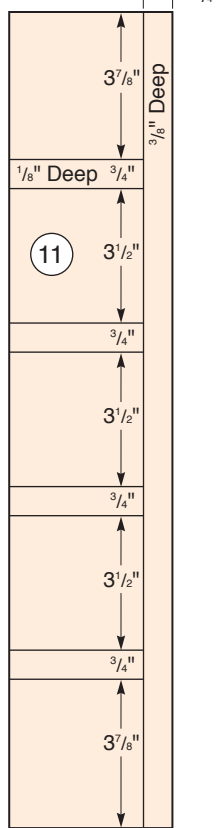

Mount the Miter Track, piece 16, between the back legs of the router table and just below the top edge of the cabinet back.

Cabinet Exploded View


MATERIAL LIST

	T x W x L
1 Cabinet Top, Bottom (2)	3/4" x 15 3/4" x 16 3/4"
2 Cabinet Sides (2)	3/4" x 10 3/4" x 15 3/4"
3 Cabinet Back (1)	3/4" x 11 1/2" x 16 3/4"
4 Drawer Front, Back (2)	1/2" x 9 3/4" x 13 3/4"
5 Drawer Sides (2)	1/2" x 9 3/4" x 15 1/2"
6 Drawer Bottom (1)	1/2" x 13 3/4" x 15"
7 Slides (1 Pr.)	14" Full Extension
8 Drawer Face (1)	3/4" x 11 1/16" x 16 5/8"
9 Wire Pull (1)	4" Satin Nickel
10 Bit Rack Tops, Bottoms (4)	3/4" x 4 1/4" x 17 1/4"
11 Bit Rack Sides (4)	3/4" x 4 1/4" x 21 1/4"
12 Bit Rack Backs (2)	3/4" x 16 1/2" x 21 1/4"
13 Bit Storage Shelves (8)	3/4" x 3 1/2" x 16"
14 Base (1)	3/4" x 17 3/4" x 25 3/4"
15 Router Bit Storage Inserts (70)	Rockler #57223
16 Miter Track (1)	Rockler #48037


Bit Storage Shelves

(Top View)

The 5/8"-dia. holes accommodate Rockler's plastic router bit storage inserts.

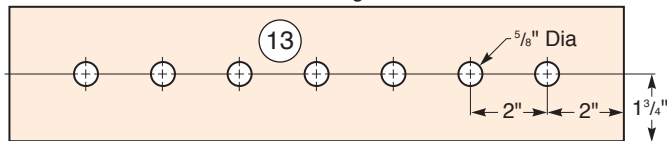

Drawer Exploded View

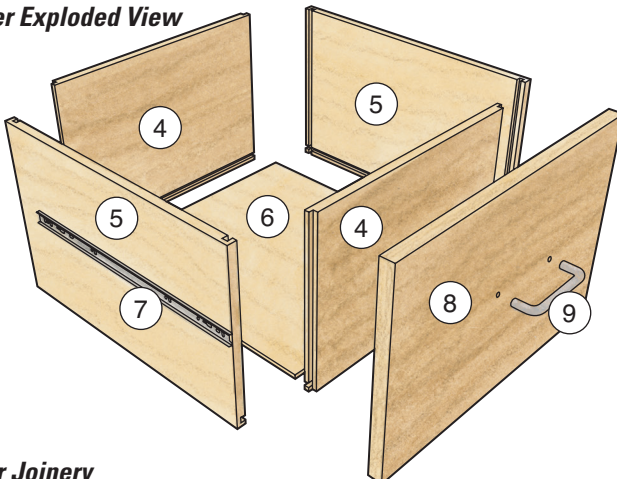

Drawer Joinery

(Top View)

